

# NVR12-32800RFAN(2U)


## 32CH 12MP Face Recognition NVR with alarms, RAID support, and NDAA compliance

Provision-ISR NVR12-32800RFAN(2U) is a high-performance network video recorder supporting Face Recognition and Advanced Video Analytics (DDA). The device, suitable for big-sized installations (up to 32 channels), features 16 alarm inputs + 4 alarm outputs and provides you with everything you need for a trouble-free CCTV project. All hardware components, including RAID, are validated to meet the demands for reliable high-definition surveillance. This model complies with NDAA demands and ensures that your devices are cyber-protected round the clock with the integrated Check Point Quantum IoT Nano agent that provides an advanced threat prevention layer against the common attack vectors at runtime.

**32**  
CH

**CHECK POINT**  
EMBEDDED

**12**  
MP

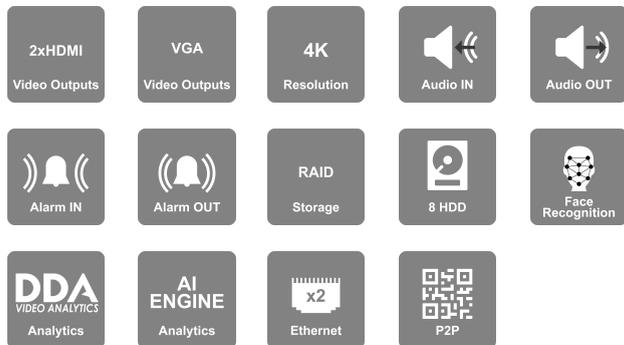

## MAIN FEATURES

### Video:

- Input: 32 Channel Support
- 32 Channel Standard Connection (Via RJ-45 Network Port)
- Output: HDMI1 (4K 30/60Hz, 1080P, 1280x1024), HDMI2 + VGA (1280x1024, 1080P)

### Bandwidth:

- Incoming: 320Mbps
- Outgoing: 256Mbps

### Decoding Support:

- H.265S/H.265+/H.265/H264

### Analytics:

- Camera Tampering, DDA2 With Object Classification, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Object Monitoring, Loitering Detection, Illegal Parking, Audio Exception, Heat Map, Object Counting (Line), Object Counting (Area), Smart Search, Face Recognition, LPR, Thermal, Crowd Gathering, People Intrusion
- Advanced Face Recognition Mode: Supports 2 Non-AI IPCs and performs face detection and recognition.

### Recording:

- 32CH 12MP Real-Time
- FPS: 800 (PAL) / 960 (NTSC)

### Playback:

- Local: 16Ch Simultaneously
- Remote: 16Ch Simultaneously

### Audio:

- Input: 1CH + IPC Inputs
- Output: 1CH + IPC Output
- 2 Way Audio

### Alarm:

- Input: 16+IPC
- Output: 4+IPC

### Storage:

- 8 x SATA (Up to 10TB each)
- 2 x E-SATA (Up to 10TB each)
- RAID: (0/1/5/6/10) Support

### USB Port:

- 2 USB 2.0 Port + 1 USB 3.0 Port

### Network:

- 2 x RJ-45: 10/100/1000Mbps Each

### Remarks:

- The following features are based on firmware v1412\_76576\_RD\_250115 and are subject to firmware version changes.



## SPECIFICATIONS

3rd Party Cyber Protection	
<b>General</b>	Quantum IoT Nano agent by Check Point™
<b>Protection Methods</b>	Shell injection protection, File Monitor, Import-Table Protection, Dynamic-Memory Protection
NDAA Compliant	
<b>NDAA Compliant</b>	Yes
Video	
<b>Video Input</b>	32Ch over Network
<b>Output</b>	HDMI1 (4K 30/60Hz, 1080P, 1280x1024), HDMI2 + VGA (1280x1024, 1080P)
<b>View Mode</b>	Independent*, Up to 32ch on monitor1 + 9ch on monitor2
<b>Fish-Eye Dewarp</b>	Local + Web
<b>Decoding Format</b>	H.265 / H.265+ / H.265S / H.264
<b>Decoding Capabilities</b>	1Ch - 12MP ; 4Ch - 4MP ; 9-32Ch - D1
Audio	
<b>Audio-specs-Input</b>	1CH RCA (Linear, 1kΩ) + IPC inputs
<b>audio-specs-Output</b>	1CH RCA (2.0 Vp-p, 1 kΩ) + IPC Outputs IP Speaker
<b>Compression</b>	G.711A/G.711U
<b>Two Way Audio</b>	Yes
Analytics	
<b>Supported Analytics</b>	Camera Tampering, DDA2 With Object Classification, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Object Monitoring, Loitering Detection, Illegal Parking, Audio Exception, Heat Map, Object Counting (Line), Object Counting (Area), Smart Search, Face Recognition, LPR, Thermal, Crowd Gathering, People Intrusion Advanced Face Recognition Mode: Supports 2 Non-AI IPCs and performs face detection and recognition.
<b>Analytics Channels (IPC Based)</b>	32Ch (requires supporting IPC)
<b>Analytic Channels (NVR Based)</b>	Up to 2Ch DDA1 (Sterile Area/Line Crossing) or Up to 2Ch Face Detection + Recognition or Up to 6Ch Face Recognition (IPC does Detection) (or their combinations)
<b>Face Recognition Rate</b>	18 Faces per second (6Ch supported)
Bandwidth	
<b>Incoming</b>	320Mbps

# NVR12-32800RFAN(2U)

<b>Outgoing</b>	256Mbps
<b>Record/ Main Stream</b>	
<b>Real-Time Recording</b>	32CH 12MP Real-Time
<b>Record Type</b>	Video / Video + Audio
<b>Recording Modes</b>	Schedule, Manual, Motion, Sensor, Analytics, POS, and all of its combinations
<b>16MP</b>	N/A
<b>12MP</b>	960FPS(NTSC)/800FPS(PAL)
<b>8MP</b>	960FPS(NTSC)/800FPS(PAL)
<b>5MP and lower</b>	960FPS(NTSC)/800FPS(PAL)
<b>Master stream over network</b>	Up to 32CH@Recording Resolution
<b>Substream</b>	
<b>Resolution substream</b>	Depends on IPC
<b>Remote view</b>	
<b>Max Channel View</b>	160Ch (Limited to Outgoing Bandwidth Capacity)
<b>Remote Applications</b>	
<b>User Access</b>	128 Users online with Professional Authority Management
<b>Mobile App</b>	Provision Cam2 for iOS/Android
<b>PC/Mac Software</b>	Ossia VMS Standard / Enterprise
<b>Plug-in free Web-Browser</b>	Chrome, FireFox, Safari, Edge, Opera. (All Limited to 4Ch Live View / Playback) *P2P WEB connection always requires Plugin
<b>Plug-in based Web-Browser</b>	Internet Explorer
<b>Playback</b>	
<b>Local</b>	16Ch
<b>Remote</b>	16Ch

<b>Search Mode</b>	DDA Object, Smart Search, LPR, Face Recognition, Time-Slice, Time, Event, POS
<b>Backup</b>	
<b>USB</b>	2 USB 2.0 Port + 1 USB 3.0 Port
<b>Backup Format</b>	AVI (Unencrypted) / Private Format (Encrypted / Unencrypted)
<b>Alarm</b>	
<b>Alarm-in</b>	16+IPC
<b>Alarm-out</b>	4+IPC
<b>Storage</b>	
<b>HDD</b>	8
<b>E-Sata Support</b>	2
<b>RAID</b>	Yes (0/1/5/6/10)
<b>PTZ</b>	
<b>Connection</b>	via Network
<b>Supported Controls</b>	Pan, Tilt, Zoom, Preset, Cruise, Scan, Iris, Focus
<b>RS-485</b>	Yes (C06 Keyboard Connection)
<b>Network</b>	
<b>Ethernet</b>	2x1000/100/10Mbps self-adaptive Ethernet interface with Fault Tolerance / Dual Network Configuration
<b>Protocols</b>	TCP/IPv4/IPv6, DHCP, DDNS, NTP, SMTP, SSL/TLS, UPnP, P2P, RTSP, FTP, HTTPS, 820.1X, SNMP, Auto Report Input + Output (Ossia VMS)
<b>ONVIF</b>	Full Device Support (Profile T/G, ONVIF Version 20.12)
<b>PoE</b>	
<b>PoE Ports</b>	N/A
<b>Speed</b>	N/A
<b>Standard</b>	N/A

# NVR12-32800RFAN(2U)

<b>CCTV Mode</b>	N/A
<b>Total Power</b>	N/A
<b>Max. Power Output (Per Ch.)</b>	N/A
<b>Others</b>	
<b>Power Supply</b>	AC100/240V
<b>Power consumption (No HDD)</b>	30W
<b>Dimension</b>	W445xD436xH90mm
<b>Operation Temperature</b>	0°C~50°C

# NVR12-32800RFAN(2U)

## DIMENSIONS

