

## Basic


Series dedicated to the installer looking for high-level cameras that make the difference in image quality.



# BSH-320AB-28

## 2MP Fixed Lens Small Bullet Camera And Hybrid LED

Equipped with a 2.8mm fixed lens, this 2MP Bullet camera is designed for short distance surveillance systems (up to 20m) for both indoor and outdoor scenarios and with its Hybrid light technology you can get a full color at night image. Featuring 4in1 technology selectable by the camera COC menu, the BSH-320AB-28 is ideal for Plug & Play over existing analog infrastructure.

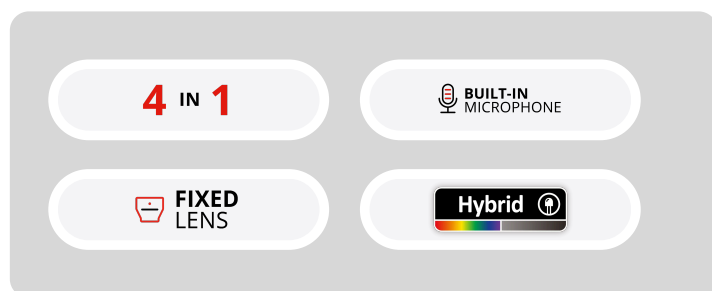

## MAIN FEATURES

- BSH-320AB-28 2MP Fixed Lens Small Bullet Camera And Hybrid LED
- Sensor: 1/3" 2MP CMOS Sensor
- Selectable Output: 2MP: 1920×1080 AHD/TVI/CVI CVBS: 700TVL
- Lens: 2.8mm Mega-Pixel Fixed (95°)
- 24/7 Full-Color Day Mode
- 2D-DNR
- Digital WDR/BLC
- Illumination: 20m (1 High-Power IR LED) 20m (1 High-Power White LED)
- IP67
- Weight: 250g
- Power: DC12V/350mA



<https://provision-isr.com>

## SPECIFICATIONS

Video	
Image Sensor	1/3" 2MP CMOS Sensor
Image Format	16:9
Effective Pixels	1920 x 1080
Scanning System	Progressive
Min. Illumination	Color: 0.005lux @F1.2, AGC on B/W: 0lux with IR
Day & Night	24/7 Full-Color Day Mode
Day & Night Modes	Ext/Auto/Day/Night

Compression	
Resolution	2MP: 1920x1080 AHD/TVI/CVI CVBS: 700TVL
Frame Rate	25/30FPS

Image	
Backlight Compensation	BLC
S/N Ratio	≥52dB (AGC off)
Noise Reduction	2D-DNR
Image Enhancement	Digital WDR, BLC


On Screen Data	
CoC Support	Yes
OSD Menu	Available via CoC only

Lens	
Field of View	2.8mm Mega-Pixel Fixed (95°)
Iris	Fixed Iris
Lens Mount	M12 Mount

Connectivity	
--------------	--

<b>Video Output</b>	2MP AHD/TVI/CVI/CVBS + PAL/NTSC
<b>Audio Connectivity</b>	Built-in Microphone
<b>Housing</b>	
<b>Illumination</b>	20m (1 High-Power IR LED) 20m (1 High-Power White LED)
<b>Bracket</b>	3-Axis Bracket
<b>Protection Rate</b>	IP67
<b>Dimensions</b>	162.1*74.8*73.8mm
<b>Weight (gross)</b>	250g
<b>Power</b>	DC12V/350mA
<b>Work Environment</b>	-10°C ~ 40°C , 10% ~ 90% humidity

## DIMENSIONS

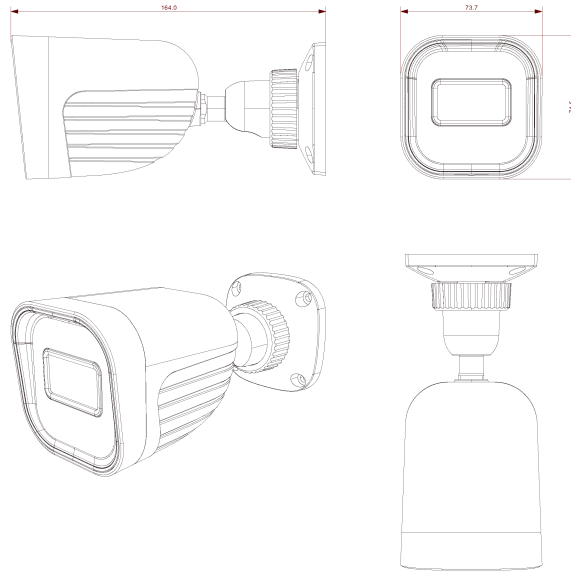

CR17-i1 尺寸线框图