

Provision-ISR DVRs feature the advanced H.264-H265 video compression format for maximum video quality alongside minimum storage volume. Their Dynamic Hybrid function allows installers to decide how the analog channels will work according to the installation needs, making this installation totally dynamic.




SH-16200A5N-2L(MM)-V3

16CH "4 in 1" + 2CH IP Dynamic Hybrid DVR

Provision-ISR SH-16200A5N-2L(MM)-V3 is a high-quality dynamic hybrid digital video recorder obtainable in an elegant mini metal case. This technology allows users to add advanced IP cameras alongside analog ones and enjoy high-quality images and other advanced features available on IP cameras only. The recorder supports Provision-ISR Standard Video Analyticycs (Pixel Based).

16
CH

2
MP
LITE

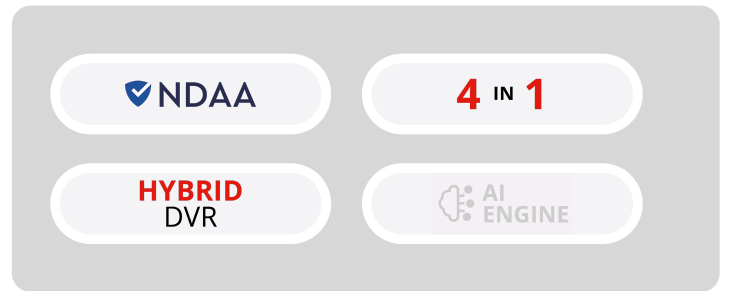

MAIN FEATURES

Video Input:

- 16CH Standard BNC + 2CH IP

Video Output:

- HDMI - FHD
- VGA

Recording:

- HD Analog: 1080P Lite: 25fps/30fps(PAL/NTSC) (only CH 1 supports) 1080P Lite: 12fps/15fps(PAL/NTSC) (other channels support)
- CVBS: 960H: 25fps/30fps(PAL/NTSC) (only CH 1 supports) 960H: 12fps/15fps(PAL/NTSC) (other channels support)
- IP: Up to 5MP@25fps

Playback:

- Local: 16Ch Simultaneously
- Remote: 8Ch Simultaneously

Audio:

- Input: 1CH + IPC Inputs
- Output: 1CH + IPC Outputs

Alarm:

- Input: IP Cameras only
- Output: IP Cameras only

Storage:

- 1 x SATA (Up to 6TB each)

Network:

- 1 x RJ-45: 10/100Mbps

PTZ Support:

- CoC / IP over Network

Power Supply:

- DC12V

Analytics:

AI by IPC:

- DDA1 Analytics Supported by the camera

Remarks:

- The following features are based on firmware v1.4.4 and are subject to firmware version changes.



SPECIFICATIONS

NDAA Compliant	
NDAA Compliant	Yes
General	
Technology	Hybrid DVR
Recording Modes	Schedule, Manual, Motion, Sensor, Analytics, POS
Format	"All in 1" Hybrid (AHD / CVI / TVI / CVBS + IP)
Video Input	
Video Input (Max Analog)	16CH Standard BNC + 2CH IP (Over Network)
Video Input (Max IP)	18CH IP (Over Network) + 0CH Standard BNC
3K Input Support	No
Video Output	
Video Output	HDMI(1920x1080), VGA (1280x1024, 1024x768)
Dual Output	Mirrored
Audio	
Audio-In	1CH RCA +IP Cameras
Audio-Out	1CH RCA (linear, 600Ω) (+IP Cameras)
Audio Over Coax	Yes (TVI Only)
Two Way Audio	Yes
Audio Compression	G.711(U/A)
Events and Analytics	
SMD (Smart Motion Detection)	Up to 16Ch
AI Analytics for HD Analog	No
Pixel based Analytics for HD Analog	Line Crossing, Sterile Area (No Direction Choice)
AI Analytics for IPC	Line Crossing (With Direction Choice), Sterile Area, Object Monitoring, Camera Tampering, Smart Search

Main Resolution and FPS	
IP Main Stream	Up to 5MP@25fps
AHD	1080P Lite/720P: 25fps/30fps(PAL/NTSC) (only CH 1 supports) 1080P Lite/720P: 12fps/15fps(PAL/NTSC) (other channels support)
TVI	1080P Lite: 25fps/30fps(PAL/NTSC) (only CH 1 supports) 1080P Lite: 12fps/15fps(PAL/NTSC) (other channels support)
CVI	1080P Lite/720P: 25fps/30fps(PAL/NTSC) (only CH 1 supports) 1080P Lite/720P: 12fps/15fps(PAL/NTSC) (other channels support)
CVBS Main Stream	CVBS: 960H: 25fps/30fps(PAL/NTSC) (only CH 1 supports) 960H: 12fps/15fps(PAL/NTSC) (other channels support)
Master Stream Over Network	16Ch

Network (Substream) Resolution and FPS	
HD Analog	1-25/30FPS@D1 Per Channel (FPS Restricted to Master Stream FPS)
IP Sub Stream	1-25/30FPS@D1 Per Channel
CVBS Sub Stream	1-25/30FPS@D1 Per Channel
Substreams over Network	90 (Outgoing bandwidth limit applies)

Remote view	
Max Channel View	90Ch (Limited to Outgoing Bandwidth Capacity)

Video Compression	
Video Compression	H.265 (HEVC) / H.264

Record	
Recording Mode	Main Stream only

Remote Applications	
User Access	10 Users online with Professional Authority Management
Mobile App	Provision Cam2 for iOS/Android
PC/Mac Software	Ossia VMS Standard / Enterprise
Plug-in free Web-Browser	Chrome, FireFox, Safari, Edge, Opera

SH-16200A5N-2L(MM)-V3

Plug-in based Web-Browser	Internet Explorer
Bandwidth	
Incoming	16Mbps
Outgoing	80Mbps
Playback	
Local Playback Channels	16Ch
Remote Playback Channels	8Ch
Search Modes	Time-Slice, Time, Event, File Management, Smart Search
Backup	
USB	2 USB 2.0 Port
Backup Format	AVI/DAT
Alarm	
Alarm-in	IP Cameras only
Alarm-out	IP Cameras only
Alarm Box Support	Yes
Storage	
HDD Max Capacity	6TB
Total HDD Max Capacity	6TB
Number of HDD	1
E-Sata	No
PTZ	
Connection	CoC / IP over Network
Supported Protocols	Pelco D, Pelco P, Samsung, Visca, ONVIF, CoC

SH-16200A5N-2L(MM)-V3

Supported Controls	Pan, Tilt, Zoom, Preset, Cruise, Scan, Iris, Focus
Network	
Ethernet	100 Mbps (RJ-45)
Protocols	TCP/IP, DHCP, DDNS, NTP, SMTP, RTSP, HTTPS, FTP, SNMP, P2P, POS
ONVIF	Yes (For IP Channels)
Others	
Dimensions	W255xD234xH42mm
Power Supply	DC12V
Operation Temperature	-10°C ~50°C